



4012B2

Weighing Machine



- › High weighing accuracy – typical giveaway of less than 0,2%
- › Number of weigh heads: 12
- › Quick dismantling and assembly of weigh buckets
- › Easy access for cleaning and service
- › Small footprint
- › Web Services enabled for remote servicing and for capturing production data
- › Optional third exit for clipping machine

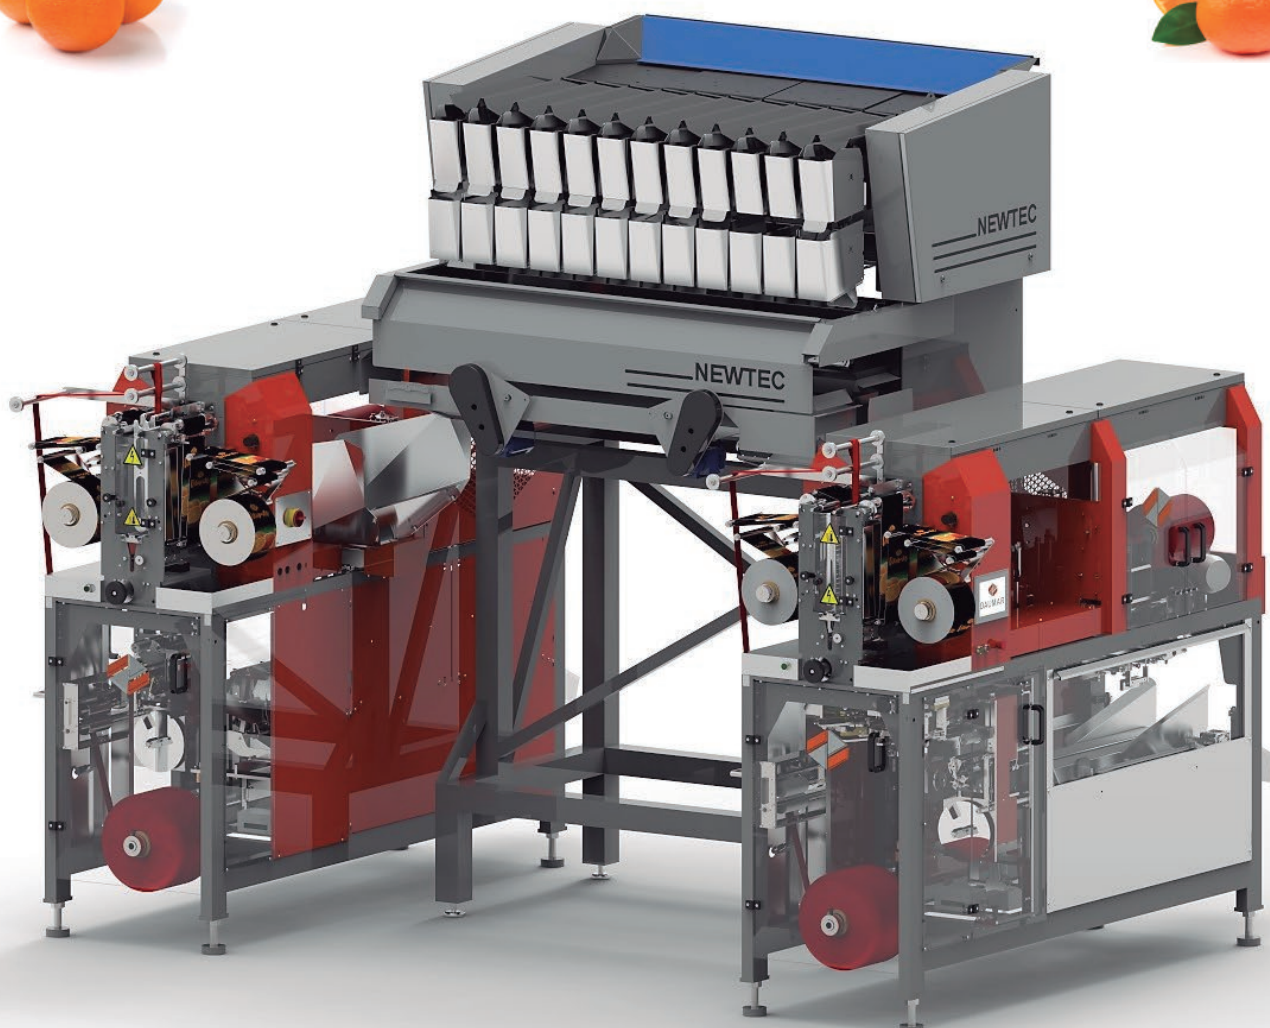

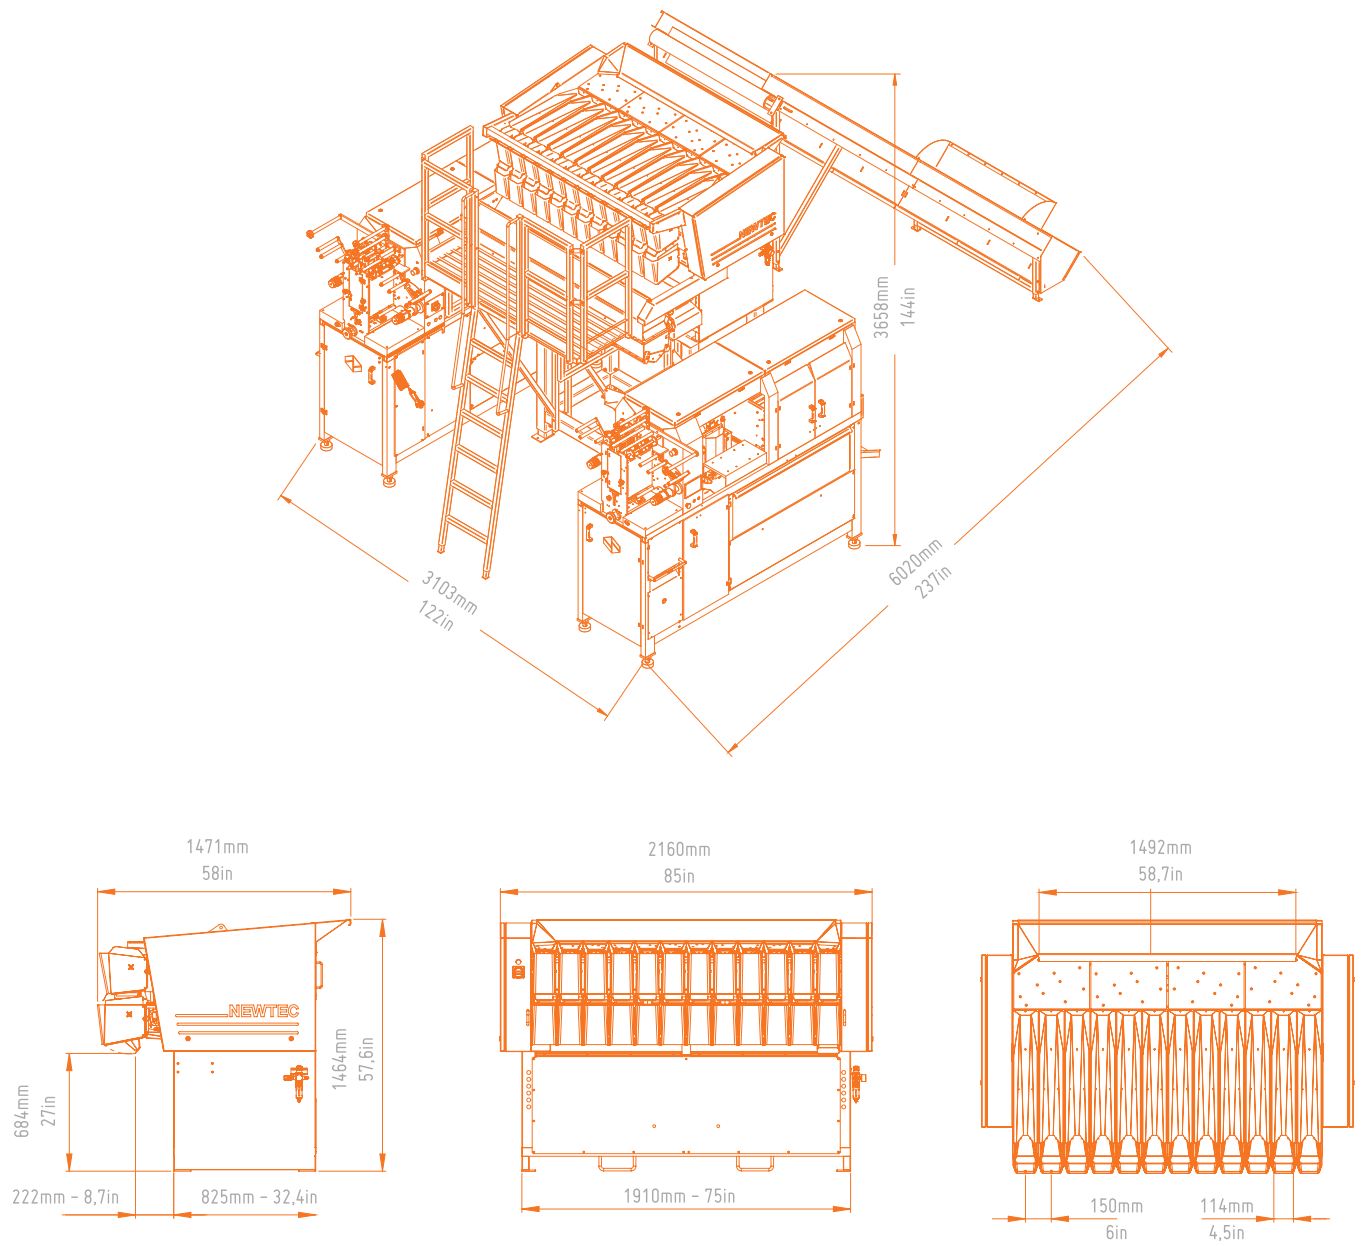


> **ATTACHED INFORMATION**

CAPACITY	0.5 - 4 kg / 1 to 10 lbs (depending on product)
PRODUCT SIZE	Ø: 20 - 120 mm / 0,75" to 4.75 "

Air Requirement

CONNECTION	3/8"
MIN. PRESSURE	6 bar (0.6 Mpa)
CONSUMPTION	80 NL/min.

ELECTRICAL REQUIREMENT	3x230 VAC or 3x400 VAC (N) E 50/60 Hz 3-6 kW
ENVIRONMENT	5° C - 40° C
WEIGHT	700 kg - 1560 lbs (excl. portion collection system)

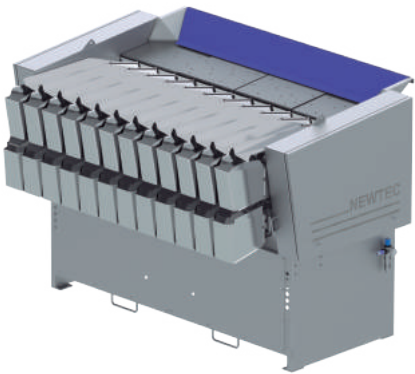

CAPACITY	1 kg 2 lbs	2.5 kg 5 lbs	4 kg 9 lbs
PORTIONS PER MIN. UP TO	65	60	45